



KEY FEATURES

- ④ All-in-one hotspot ticket generator combo set
- ④ Comprising Smart Device Server SDS-AG1100 and POS ticket printer PRT-AG1100
- ④ Ideal for use with NetComm Wireless Hotspot HS1100 or NetComm Internet Access Controller IAC3000
- ④ Easy solution that turns your venue into a managed, branded and money making Internet hotspot
- ④ Allows user account generation at the point of sale
- ④ Triggers the built-in on-demand billing plans inside HS1100 hotspot or IAC3000 controller
- ④ Prints out account tickets
- ④ SDS-AG1100 provides networkability to the thermal printer where thermal printers can be placed at desired locations

Model Code/ Part Number	Description	APN Code
AG1100	NetComm Infrastructure Series Network Ticket Generator	9317773014341


Simple, All-in-One POS Ticket Generator Combo Set

As Internet usage continues to become more mobile, customers have an increasing expectation for wireless Internet access at public locations, such as in coffee shops, restaurants, hotel lobbies, convention centers or airport terminals.

Whether you are thinking of running a hotspot for free or for a fee, you will need a hotspot management system to maintain quality of service for your customers, eliminate free-riders, and keep your network secure.

The all-in-one hotspot network ticket generator combo set, Device Server SDS-AG1100 and POS Printer PRT-AG1100, is able to turn your venue instantly into a managed, branded and moneymaking hotspot.

Device Server SDS-AG1100 and POS Printer PRT-AG1100 lead a simpler way to serve the hotspot area. Designed to support account generation, Device Server SDS-AG1100 triggers the built-in on-demand billing plan(s) inside NetComm's HS1100 or IAC3000 and then prints account tickets with POS Printer PRT-AG1100. NetComm's HS1100 and IAC3000 can simultaneously support multiple Device Server SDS-AG1100 and POS Printer PRT-AG1100 via the network.

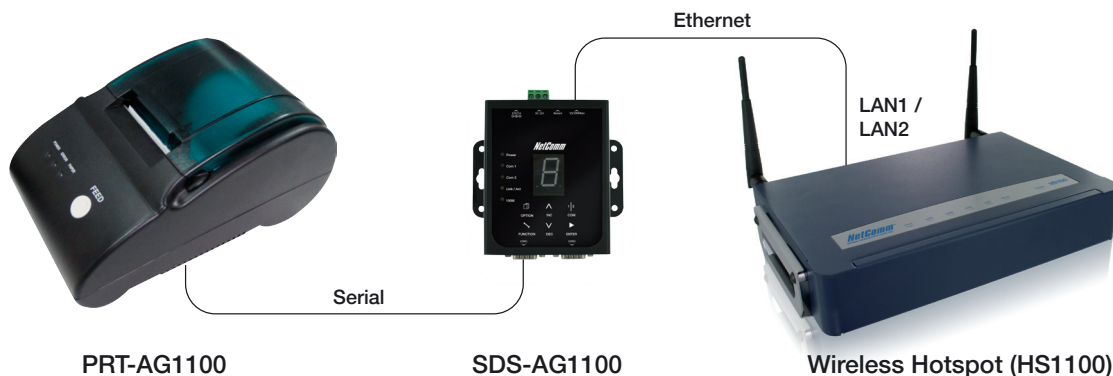

TECHNICAL SPECIFICATIONS

SDS-AG1100 (Smart Device Server)	
ETHERNET (RJ-45) PORT	1x Fast Ethernet 10/100 Mbps
SERIAL RS-232 PORTS	2x DB-9M, Baud rate 9600 bps
CONFIGURATION OPTIONS	Web user interface
INPUT VOLTAGE	12 to 48 V DC (Power Supply: 12VDC 1.5A)
POWER CONSUMPTION	200 mA @ 12 V, 106 mA @ 24 V
DIMENSIONS	90 x 123 x 27 mm (w/o mounting kit)
WEIGHT	300 g
PRT-AG1100 Thermal POS 2" Ticket Printer	
PRINT METHOD	Thermal Line Printing
PRINTING SPEED	52 mm/s
PRINT DENSITY	384 dots/line or 8 dots/mm
PAPER WIDTH	57.5 ± 0.5mm
CHARACTER	ASCII code 12*24 dots, Graphic font: 24*24 dots
POWER SUPPLY	8 V DC / 3.5 A
OPERATING TEMPERATURE	0 °C to 50 °C
STORAGE TEMPERATURE	-20 °C to 60 °C
DIMENSIONS	185 x 114 x 90 mm
WEIGHT	900g