




3G41WT Telstra Corp Setup Guide


(3G41WT)

3G41WT Telstra Corp Setup Guide

1. Open your web browser and navigate to the site <http://192.168.20.1>

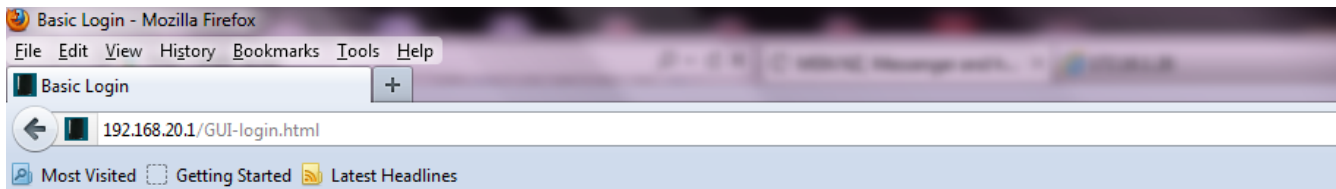

2. Click on Switch to advance view at the bottom of the window.

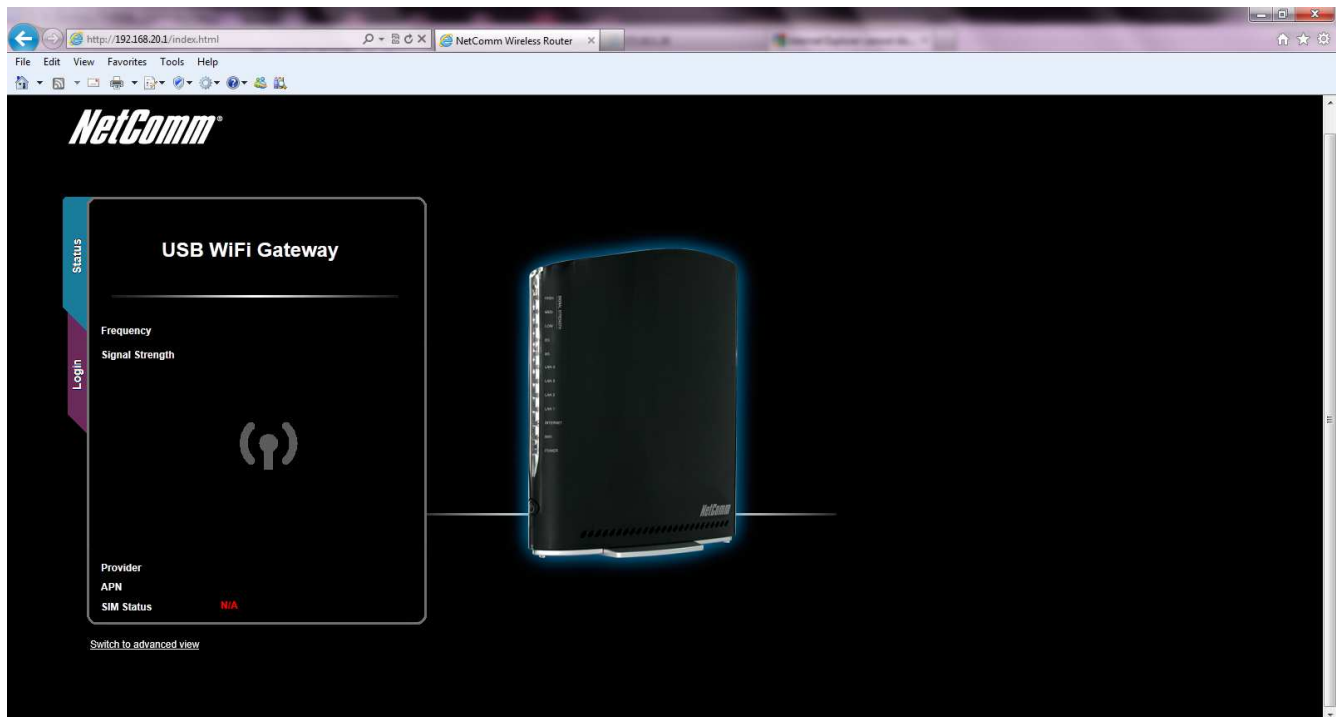

3. Use admin for the username and admin for the password.



The screenshot shows the NetComm USB WiFi Gateway login page. At the top left is the NetComm logo and website URL. The page title is "USB WiFi Gateway". A navigation bar contains links for Home, Status, Login, and Log. Below the navigation bar, the "Login" section is active. It features a "Login" header, a "User Name:" field with "admin" entered, a "Password:" field with masked characters, and "Submit" and "Clear" buttons.

4. Click on Internet, select WWAN(3G) and then select Connection.



The screenshot shows the NetComm USB WiFi Gateway configuration page. The "Internet Settings" menu is expanded, showing options for WWAN (3G), LAN, and WAN. The "WWAN (3G)" option is selected, and its sub-menu is also expanded, showing "Connection", "Band/Provider", and "SIM Security".

5. Change your Profile Name to Telstra Corp
6. Setup your APN to Telstra.Corp. Set your country selection to Australia.
7. Ensure Mobile Broadband is set to Enable.
8. Enter your Telstra Corp email address (example@telstra.com) in the Username field.
9. Enter your Telstra Corp password in the password field.
10. Ensure the Authentication Type is set to CHAP.
11. Enable NAT Masquerading.
12. Click Save at the bottom of the window to implement changes.

The screenshot shows the NetComm USB WiFi Gateway web interface. The main heading is "USB WiFi Gateway" with a "Site Map" link. The navigation menu includes Home, Status, Internet Settings, Wireless LAN, Services, and System. The current page is "Internet Settings > WWAN (3G) > Connection".

WWAN (3G) Profile Settings

Profile Name: Automatically configure my mobile broadband

Profile Name:

APN Name: Country: [Choose an APN here](#)

Mobile Broadband: Enable Disable

Username:

Password:

Authentication Type: CHAP PAP

Reconnect Delay: (30-65535) secs

Reconnect Retries: (1-65535, 0=Unlimited)

Metric: (1-65535)

NAT Masquerading: Enable Disable

Profile Name	Enabled	APN	User
Telstra Corp	Yes	Telstra.Corp	example@telstra.com
Profile2	No		
Profile3	No		
Profile4	No		

Roaming Settings

Data Roaming: Enable Disable

User Name: admin

Copyright © 2011 NetComm Limited. | All Rights Reserved